


SPECIFICATION

Contact Rating: 2.5A/250VAC (CSA, UL, N, S, D, FI, VDE, 3C)
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute


SERIES NUMBER: ST-02(none, C, E, H)



PART NUMBERING SYSTEM

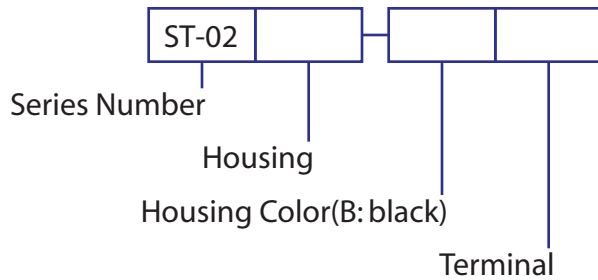

DIMENSIONS(mm)

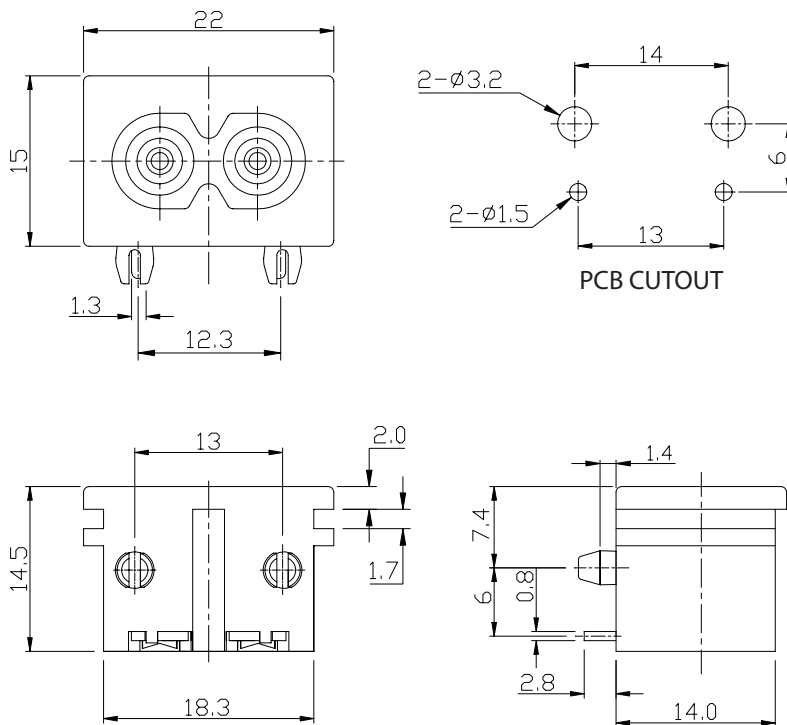

HOUSING	TERMINAL
 CODE: NONE	 CODE: P
 CODE: C	 CODE: L
 CODE: E	 CODE: W
 CODE: H	