

SPECIFICATION

SERIES NUMBER: SD-006

Contact Rating: 16(8)A 250V ~μ 5E4 T105(ENEC)

20.5A 125/250VAC(C-UL&UL)

1/2HP 125VAC

1 1/2HP 250VAC

Contact Resistance: 50mΩ (max) initial


Insulation Resistance: 500MΩ (min) 500VDC

Dielectric Strength: 1500VAC/1 minute

Electrical Life: 100,000 cycles



PART NUMBERING SYSTEM

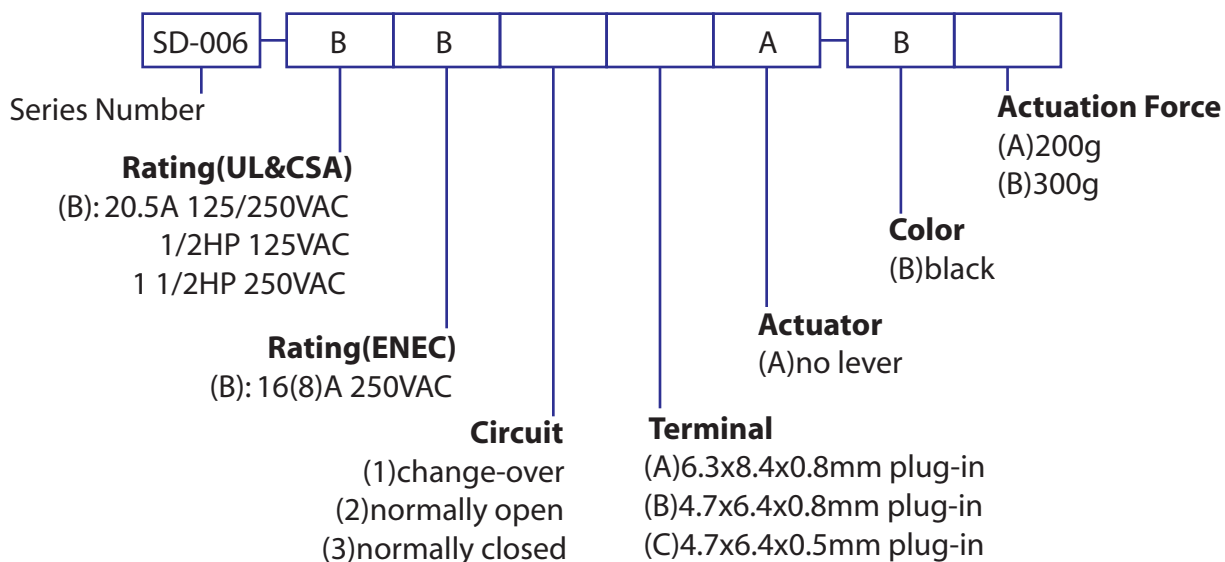

DIMENSIONS(mm)

