



SPECIFICATION

SERIES NUMBER: PS02

Contact Rating: 0.2A 30VDC  
 Contact Resistance: 20mΩ (max) at initial  
 Insulation Resistance: 100MΩ (min) 500VDC  
 Dielectric Strength: 500VAC/1 minute  
 Electrical Life: 20000 cycles  
 Operation Force: 300+/-100g  
 Pole-Position: 2-2



PART NUMBERING SYSTEM

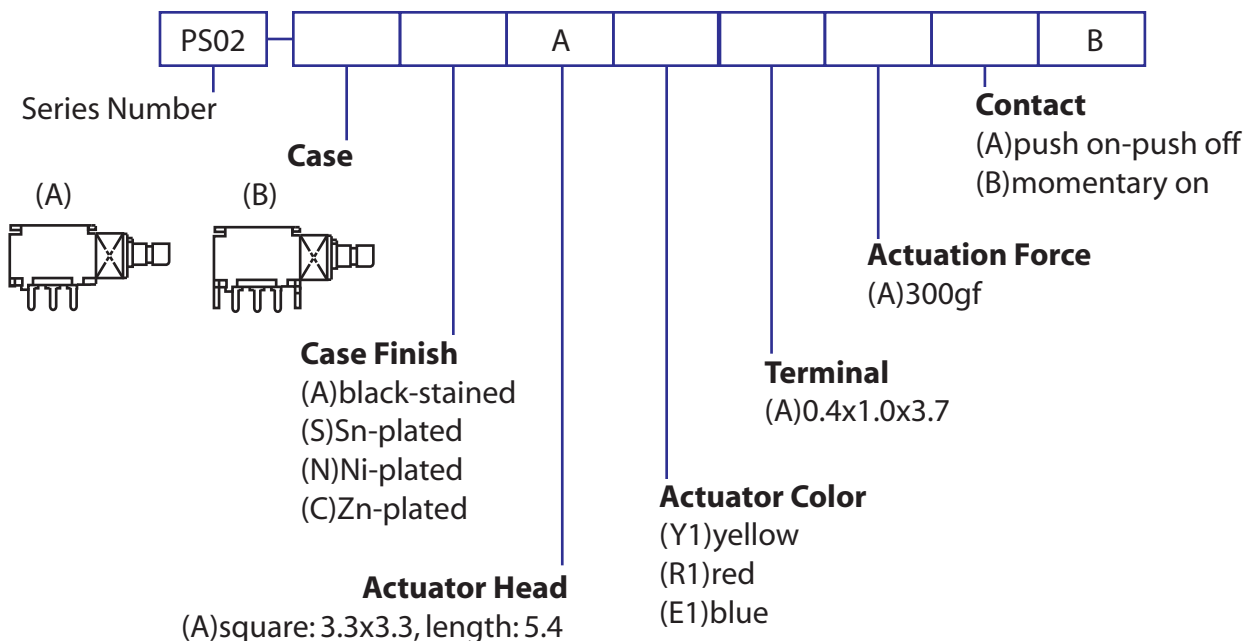

DIMENSIONS(mm)

