


SPECIFICATION

Contact Rating: 10A/125VAC 6A/250VAC
 6A/250VAC T85/55
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 10000 cycles
 Operation Force: 600+/-300g

SERIES NUMBER: MR-21S



PART NUMBERING SYSTEM

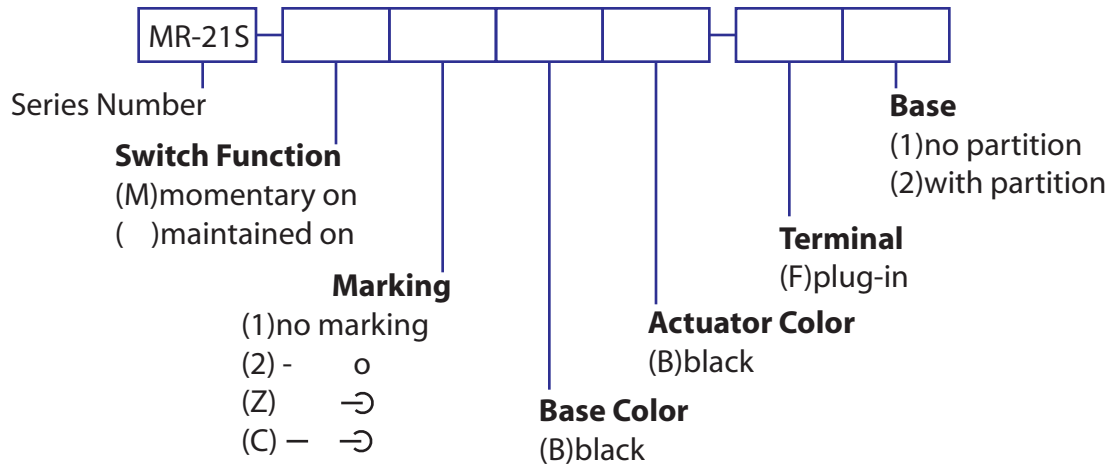

DIMENSIONS(mm)

