


SPECIFICATION

Contact Rating: 0.5A/125VDC
 4A/125VAC 3A/250VAC
 Contact Resistance: 20mΩ (max) initial
 Insulation Resistance: 100MΩ (min) 500VDC
 Dielectric Strength: 1500VAC/1 minute
 Electrical Life: 10,000 cycles
 Operation Force: 1000+/-200g
 Pole: single
 Position: 1-8

SERIES NUMBER: RS26



PART NUMBERING SYSTEM

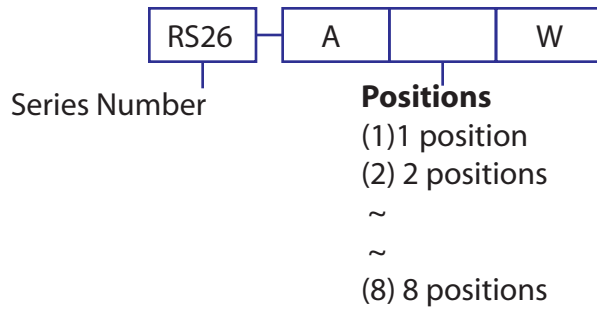

DIMENSIONS(mm)

