


SPECIFICATION

SERIES NUMBER: EV-12

Contact Rating: 12A 125/250VAC T85(UL, CSA)
 10(1)A 250V~μ T85(VDE, S, D, N, FI)
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electric Life: 300 cycles
 Operation Force: 500+/-200g(DP)



PART NUMBERING SYSTEM

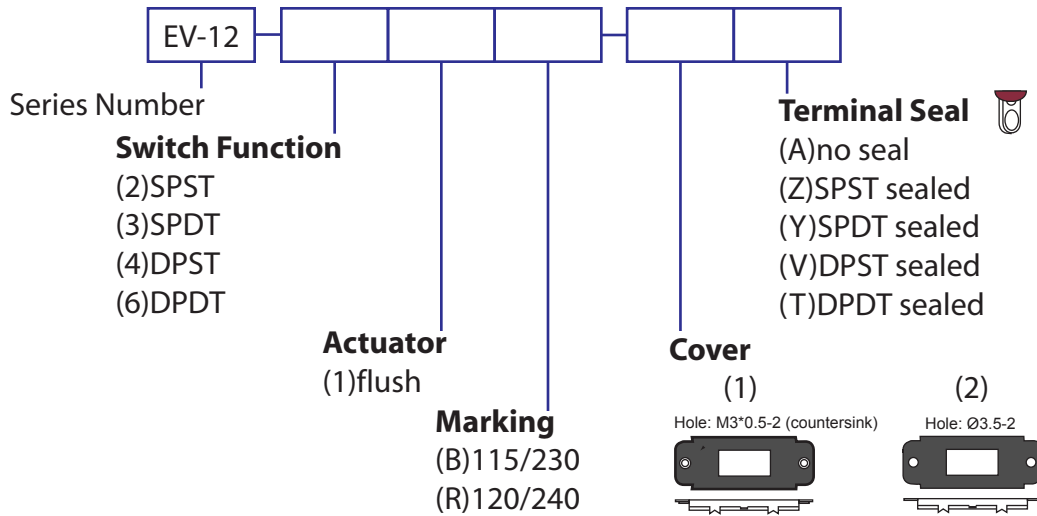

DIMENSIONS(mm)

