



SPECIFICATION

Contact Rating: 12A 125/250VAC(UL, CSA)
 10(1)A 250VAC~μT85(N,S,D,FI,VDE)
 Contact Resistance: 50mΩ (max) initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 300 cycles
 Operation Force: 500+/-200g

SERIES NUMBER: EV-12C

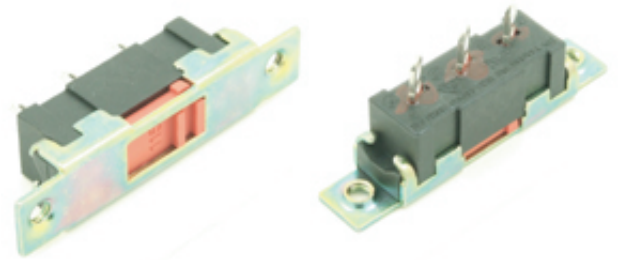

PART NUMBERING SYSTEM

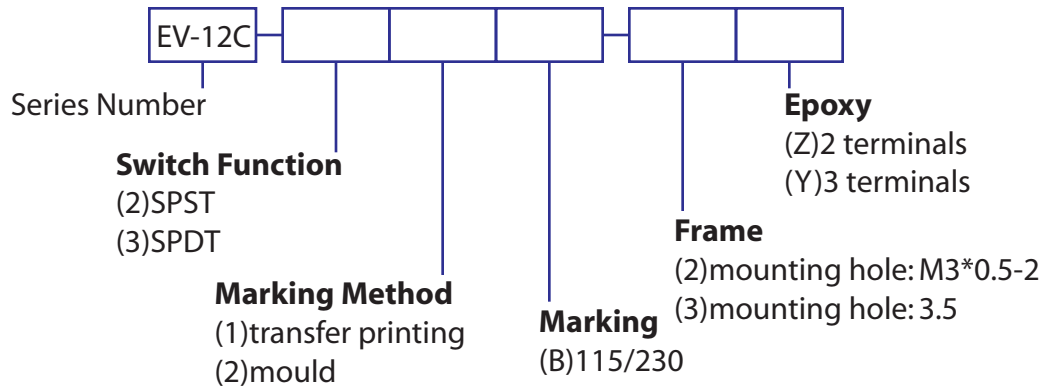

DIMENSIONS(mm)

