


SPECIFICATION

Contact Rating: 10A 250VAC(UL, CSA)
 10(1)A 250VAC~μT85(N,S,D,FI,VDE)
 Contact Resistance: 20mΩ (max) initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 300 cycles
 Operation Force: 1500+/-300g

SERIES NUMBER: EV-32



PART NUMBERING SYSTEM

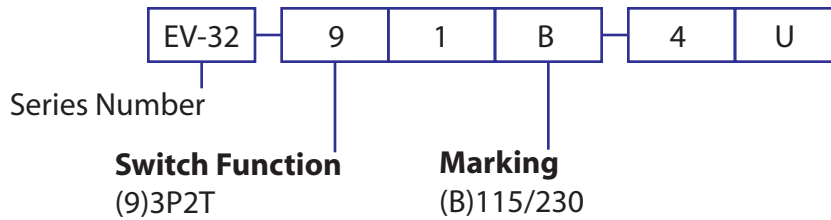

DIMENSIONS(mm)

