




SPECIFICATION

Contact Rating: 10A 250VAC(C-UL)
 10(1)A 250VAC~μT85
 Contact Resistance: 20mΩ (max) initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 6000 cycles
 Operation Force: 1000+/-200g

SERIES NUMBER: EV-33

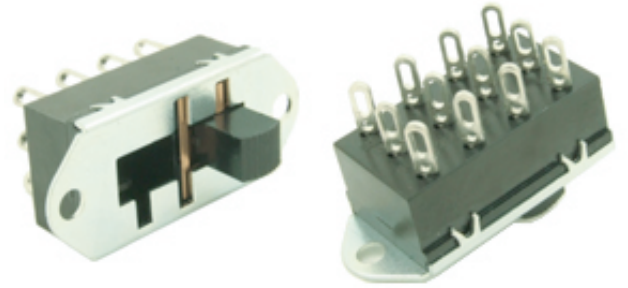

PART NUMBERING SYSTEM

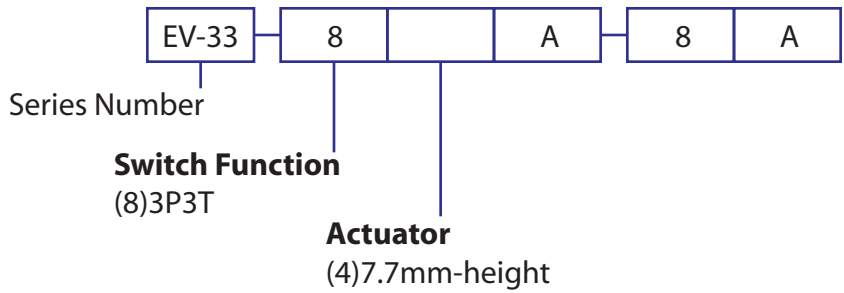

EV-33-85A-8A

DIMENSIONS(mm)

